


<b>Bit Size Range</b>	4-3/4 - 5-7/8 in	121 - 149 mm
<b>Bit Box Connection</b>	2-7/8 REGULAR	
<b>Dynamic Bearing Load On/Off Bottom</b>	31850 lbf	14200 daN
<b>Static Bearing Load On/Off Bottom</b>	104100 lbf	46300 daN
<b>Max. Overpull (For Re-run)</b>	154100 lbf	68500 daN
<b>Absolute Overpull</b>	256800 lbf	114200 daN
<b>Adjustable Makeup Torque</b>	3500 ft-lbs	4700 Nm
<b>Stab/Thread Protector Makeup Torque</b>	3500 ft-lbs	4700 Nm
<b>A = Bit to Stabilizer (Centre)</b>	10 in	254 mm
<b>B = Bit to Bend</b>	<b>Adjustable</b>	50.6 in / 1285 mm
	<b>Fixed</b>	41.5 in / 1054 mm
<b>C = Overall (With Dump Sub)</b>	172.7 in	4387 mm
<b>Weight</b>	311 lbs	141 kg

<b>Lobe Configuration</b>	6-7 Lobe 1.7 Stage	
<b>Displacement (No Load)</b>	1 rev/gal	0.26 rev/l
<b>Max. Differential (Full Load)</b>	432 psi	2979 kPa
<b>Max. Torque</b>	986 ft-lbs	1337 Nm
<b>Max. Power</b>	28 HP	21 kW

Flow Rate		Speed
GPM	LPM	RPM
80	303	69 - 80
120	454	109 - 120
160	606	148 - 160

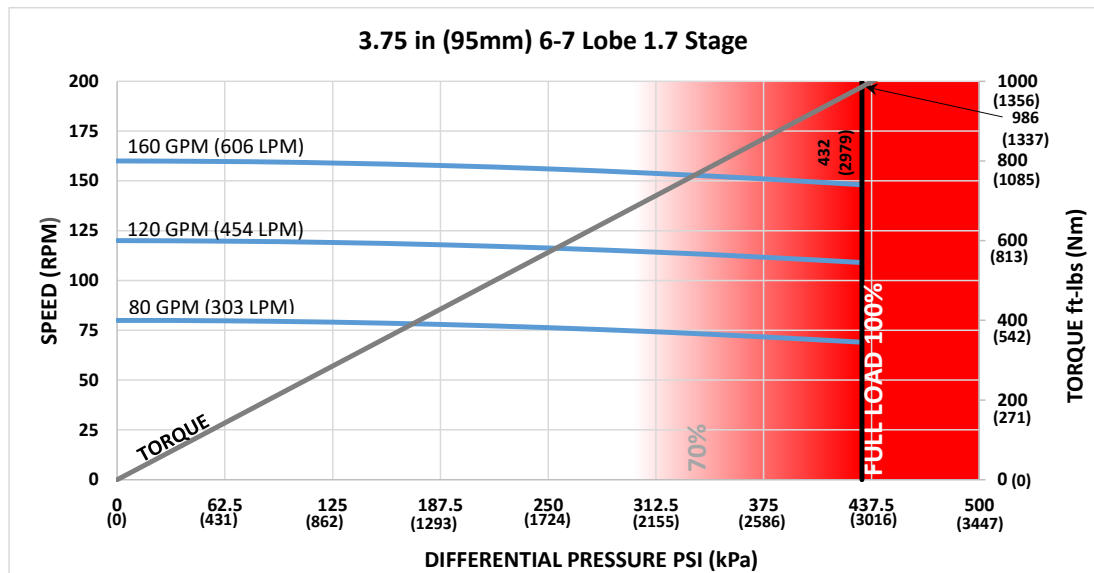

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

**ADJUSTABLE BUILD RATE**

Hole Size	SLICK				STABILIZED			
	4-3/4 (121mm)	5 (127mm)	5-1/4 (133mm)	5-7/8 (149mm)	4-3/4 (121mm)	5 (127mm)	5-1/4 (133mm)	5-7/8 (149mm)
<b>BEND ANGLE</b>	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
0.39	1.3	-	-	-	3.7	4.4	5.2	7.0
0.78	7.2	5.3	3.5	-	7.9	8.6	9.4	11.2
1.15	12.7	10.8	9.0	4.4	12.7	12.6	13.3	15.2
1.50	17.9	16.1	14.2	9.6	17.9	16.3	17.1	18.9
1.83	22.8	21.0	19.1	14.5	22.8	21.0	20.6	22.5
2.12	27.2	25.3	23.5	18.9	27.2	25.3	23.7	25.6
2.38	31.1	29.2	27.4	22.7	31.1	29.2	27.4	28.4
2.60	34.3	32.5	30.6	26.0	34.3	32.5	30.6	30.7
2.77	36.9	35.0	33.2	28.6	36.9	35.0	33.2	32.5
2.90	38.8	37.0	35.1	30.5	38.8	37.0	35.1	33.9
2.97	39.9	38.0	36.2	31.6	39.9	38.0	36.2	34.7
3.00	40.3	38.5	36.6	32.0	40.3	38.5	36.6	35.0

Note: Stabilizers are 1/8" undergauge

**FBH BUILD RATE**

Hole Size	SLICK				STABILIZED			
	4-3/4 (121mm)	5 (127mm)	5-1/4 (133mm)	5-7/8 (149mm)	4-3/4 (121mm)	5 (127mm)	5-1/4 (133mm)	5-7/8 (149mm)
<b>BEND ANGLE</b>	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
1.25	13.1	10.9	8.7	3.2	14.1	14.8	15.6	17.4
1.50	16.8	14.6	12.4	6.9	17.0	17.7	18.5	20.4
1.75	20.5	18.3	16.1	10.7	20.5	20.7	21.4	23.3
2.00	24.3	22.1	19.9	14.4	24.3	23.6	24.3	26.2
2.25	28.0	25.8	23.6	18.1	28.0	26.5	27.2	29.1
2.50	31.7	29.5	27.3	21.9	31.7	29.5	30.2	32.0

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.

For custom motor configurations and build rates, please contact your DYNOMAX office.