




Bit Size Range	7-7/8 - 9-7/8 in	200 - 251 mm
Bit Box Connection	4-1/2 REGULAR	
Dynamic Bearing Load On/Off Bottom	131700 lbf	58600 daN
Static Bearing Load On/Off Bottom	420400 lbf	187000 daN
Max. Overpull (For Re-run)	328000 lbf	145900 daN
Absolute Overpull	546000 lbf	242900 daN
Adjustable Makeup Torque	25000 ft-lbs	33900 Nm
Stab/Thread Protector Makeup Torque	12000 ft-lbs	16300 Nm
A = Bit to Stabilizer (Centre)	16.45 in	418 mm
B = Bit to Bend	Adjustable 64.97 in	1650 mm
	Fixed 52.97 in	1345 mm
C = Overall (With Dump Sub)	332.7 in	8451 mm
Weight	2439 lbs	1106 kg

Lobe Configuration	4-5 Lobe 7 Stage HR	
Displacement (No Load)	0.49 rev/gal	0.13 rev/l
Max. Differential (Full Load)	1650 psi	11376 kPa
Max. Torque	8820 ft-lbs	11958 Nm
Max. Power	420 HP	313 kW

Flow Rate		Speed
GPM	LPM	RPM
300	1136	100 - 150
450	1703	175 - 225
600	2271	250 - 300

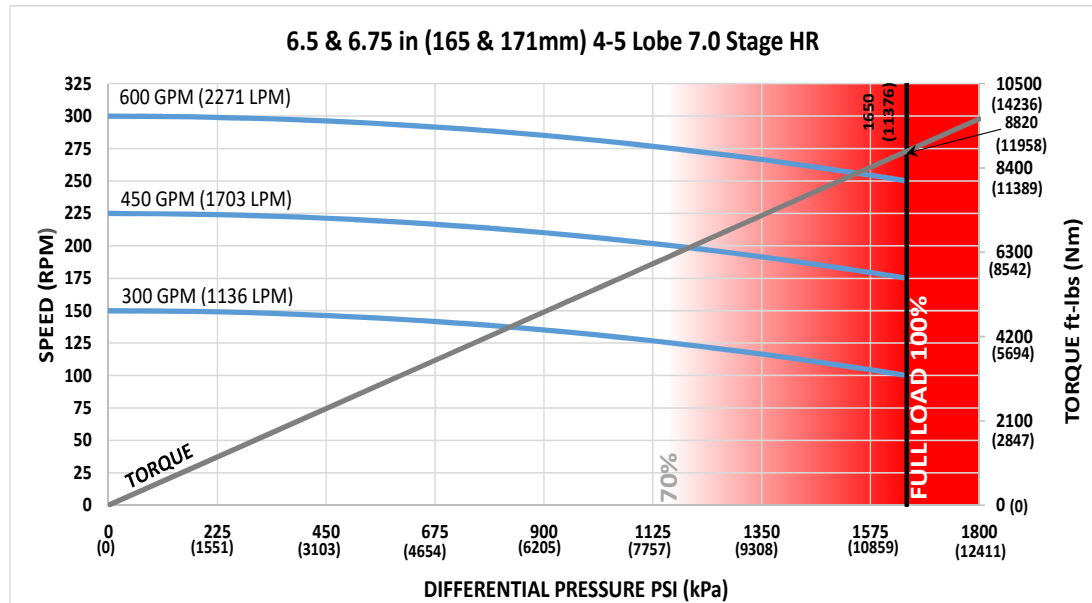

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

ADJUSTABLE BUILD RATE

Hole Size	SLICK				STABILIZED			
	7-7/8 (200mm)	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	7-7/8 (200mm)	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)
BEND ANGLE	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
0.39	0.5	-	-	-	2.2	2.7	2.9	-
0.78	3.4	1.6	0.9	-	4.7	5.2	5.4	6.2
1.15	6.3	4.5	3.7	0.5	7.1	7.5	7.7	8.6
1.50	8.9	7.1	6.4	3.2	9.3	9.8	9.9	10.8
1.83	11.4	9.6	8.9	5.7	11.4	11.8	12.0	12.9
2.12	13.7	11.9	11.1	7.9	13.7	13.7	13.9	14.7
2.38	15.6	13.8	13.1	9.9	15.6	15.3	15.5	16.4
2.60	17.3	15.5	14.8	11.6	17.3	16.7	16.9	17.8
2.77	18.6	16.8	16.1	12.9	18.6	17.8	18.0	18.9
2.90	19.6	17.8	17.1	13.9	19.6	18.6	18.8	19.7
2.97	20.1	18.3	17.6	14.4	20.1	19.1	19.3	20.1
3.00	20.4	18.6	17.8	14.6	20.4	19.3	19.5	20.3

FBH BUILD RATE

Hole Size	SLICK				STABILIZED			
	7-7/8 (200mm)	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	7-7/8 (200mm)	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)
BEND ANGLE	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
1.25	6.5	4.4	3.5	-	8.1	8.6	8.8	9.6
1.50	8.4	6.3	5.4	1.6	9.8	10.2	10.4	11.3
1.75	10.3	8.2	7.3	3.5	11.4	11.9	12.1	12.9
2.00	12.2	10.1	9.2	5.4	13.1	13.6	13.8	14.6
2.25	14.1	12.0	11.1	7.3	14.7	15.2	15.4	16.3
2.50	16.0	13.9	13.0	9.2	16.4	16.9	17.1	17.9

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.

For custom motor configurations and build rates, please contact your DYNOMAX office.

Note: Stabilizers are 1/8" undergauge