




Bit Size Range	7-7/8 - 9-7/8 in	200 - 251 mm
Bit Box Connection	4-1/2 REGULAR	
Dynamic Bearing Load On/Off Bottom	128500 lbf	57200 daN
Static Bearing Load On/Off Bottom	404500 lbf	179900 daN
Max. Overpull (For Re-run)	406900 lbf	181000 daN
Absolute Overpull	678200 lbf	301700 daN
Adjustable Makeup Torque	25000 ft-lbs	33900 Nm
Stab/Thread Protector Makeup Torque	12000 ft-lbs	16300 Nm
A = Bit to Stabilizer (Centre)	16.3 in	414 mm
B = Bit to Bend	Adjustable 73 in	1854 mm
	Fixed 61.1 in	1552 mm
C = Overall (With Dump Sub)	376.1 in	9553 mm
Weight	2900 lbs	1315 kg

Lobe Configuration	7-8 Lobe 3.3 Stage HR	
Displacement (No Load)	0.15 rev/gal	0.04 rev/l
Max. Differential (Full Load)	560 psi	3861 kPa
Max. Torque	9400 ft-lbs	12745 Nm
Max. Power	136 HP	101 kW

Flow Rate		Speed
GPM	LPM	RPM
300	1136	31 - 50
450	1703	54 - 70
600	2271	76 - 90

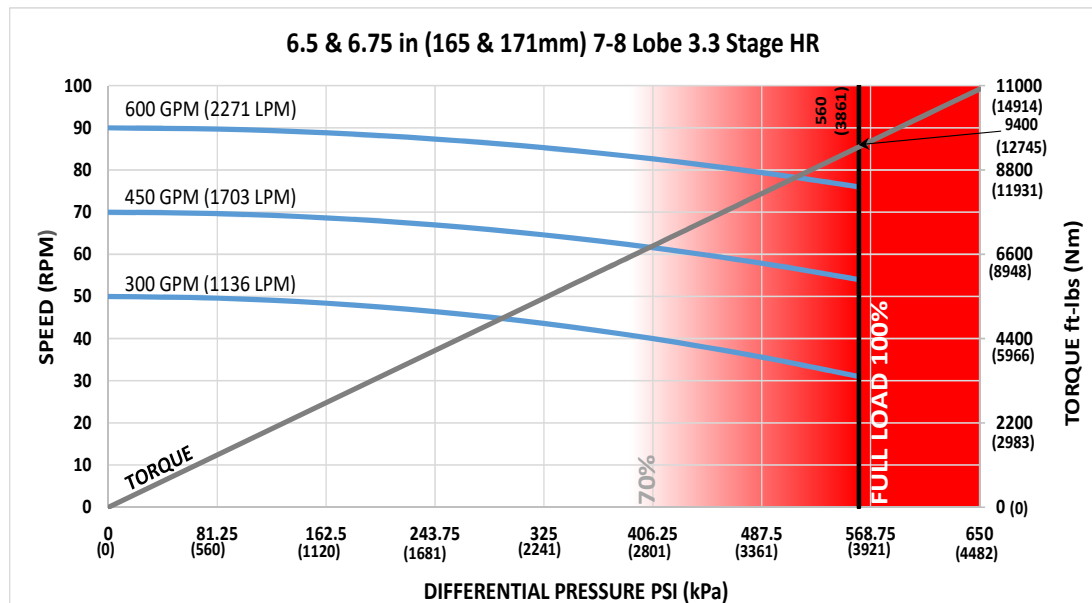

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

ADJUSTABLE BUILD RATE

Hole Size	SLICK				STABILIZED			
	7-7/8 (200mm)	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	7-7/8 (200mm)	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)
BEND ANGLE	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
0.39	1.2	-	-	-	1.9	2.2	2.4	-
0.78	3.8	2.4	1.8	-	4.0	4.4	4.5	5.2
1.15	6.3	4.8	4.3	1.7	6.3	6.5	6.6	7.3
1.50	8.6	7.2	6.6	4.1	8.6	8.4	8.5	9.2
1.83	10.8	9.4	8.8	6.3	10.8	10.2	10.4	11.0
2.12	12.8	11.3	10.8	8.2	12.8	11.8	12.0	12.6
2.38	14.5	13.1	12.5	10.0	14.5	13.3	13.4	14.1
2.60	16.0	14.6	14.0	11.4	16.0	14.6	14.7	15.3
2.77	17.1	15.7	15.1	12.6	17.1	15.7	15.6	16.2
2.90	18.0	16.6	16.0	13.4	18.0	16.6	16.3	17.0
2.97	18.5	17.0	16.5	13.9	18.5	17.0	16.7	17.4
3.00	18.7	17.2	16.7	14.1	18.7	17.2	16.9	17.5

Note: Stabilizers are 1/8" undergauge

FBH BUILD RATE

Hole Size	SLICK				STABILIZED			
	7-7/8 (200mm)	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	7-7/8 (200mm)	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)
BEND ANGLE	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
1.25	6.7	5.0	4.3	1.3	6.9	7.3	7.5	8.1
1.50	8.3	6.7	6.0	3.0	8.4	8.8	8.9	9.6
1.75	10.0	8.3	7.7	4.7	10.0	10.2	10.4	11.0
2.00	11.7	10.0	9.4	6.4	11.7	11.7	11.8	12.5
2.25	13.4	11.7	11.0	8.0	13.4	13.1	13.3	13.9
2.50	15.0	13.4	12.7	9.7	15.0	14.6	14.7	15.4

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.

For custom motor configurations and build rates, please contact your DYNOMAX office.