




Bit Size Range	8-1/2 - 9-7/8 in	216 - 251 mm
Bit Box Connection	4-1/2 REGULAR	
Dynamic Bearing Load On/Off Bottom	100357 lbf	44600 daN
Static Bearing Load On/Off Bottom	355612 lbf	158200 daN
Max. Overpull (For Re-run)	432800 lbf	192500 daN
Absolute Overpull	721400 lbf	320900 daN
Adjustable Makeup Torque	25000 ft-lbs	33900 Nm
Stab/Thread Protector Makeup Torque	12000 ft-lbs	16300 Nm
A = Bit to Stabilizer (Centre)	21.1 in	536 mm
B = Bit to Bend	Adjustable	66.7 in / 1694 mm
	Fixed	54.6 in / 1387 mm
C = Overall (With Dump Sub)	429.7 in	10914 mm
Weight	3205 lbs	1454 kg

Lobe Configuration	7-8 Lobe 8.5 Stage HR	
Displacement (No Load)	0.26 rev/gal	0.07 rev/l
Max. Differential (Full Load)	1910 psi	13169 kPa
Max. Torque	18710 ft-lbs	25367 Nm
Max. Power	606 HP	452 kW

Flow Rate		Speed
GPM	LPM	RPM
500	1893	100 - 130
625	2366	135 - 165
750	2839	170 - 200

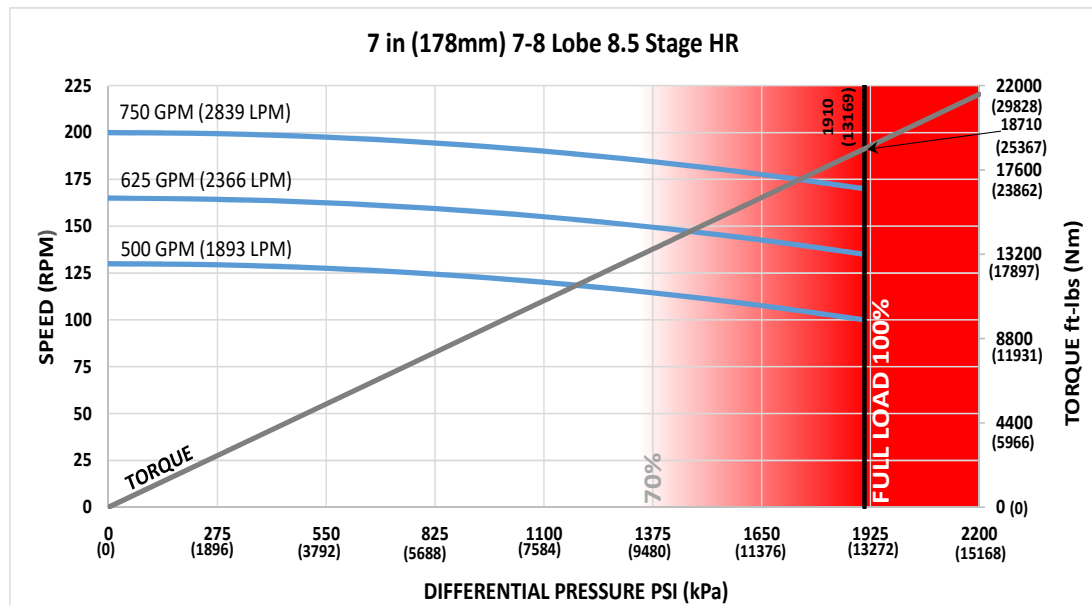

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

ADJUSTABLE BUILD RATE

Hole Size	SLICK				STABILIZED			
	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	-	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	-
BEND ANGLE	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
0.39	2.7	2.2	-	-	2.7	2.2	2.6	-
0.78	5.0	4.4	2.0	-	5.0	4.4	4.6	-
1.15	7.1	6.6	4.2	-	7.1	6.6	6.5	-
1.50	9.2	8.6	6.2	-	9.2	8.6	8.3	-
1.83	11.1	10.6	8.2	-	11.1	10.6	10.0	-
2.12	12.8	12.3	9.8	-	12.8	12.3	11.4	-
2.38	14.3	13.8	11.4	-	14.3	13.8	12.8	-
2.60	15.6	15.1	12.6	-	15.6	15.1	13.9	-
2.77	16.6	16.0	13.6	-	16.6	16.0	14.8	-
2.90	17.3	16.8	14.4	-	17.3	16.8	15.4	-
2.97	17.7	17.2	14.8	-	17.7	17.2	15.8	-
3.00	17.9	17.4	15.0	-	17.9	17.4	16.0	-

Note: Stabilizers are 1/8" undergauge

FBH BUILD RATE

Hole Size	SLICK				STABILIZED			
	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	-	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	-
BEND ANGLE	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
1.25	5.4	4.7	1.9	-	6.6	6.7	7.2	-
1.50	6.8	6.2	3.3	-	7.9	8.0	8.5	-
1.75	8.3	7.6	4.8	-	9.3	9.4	9.9	-
2.00	9.7	9.1	6.2	-	10.6	10.7	11.2	-
2.25	11.2	10.6	7.7	-	11.9	12.0	12.5	-
2.50	12.7	12.0	9.2	-	13.2	13.4	13.9	-

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.

For custom motor configurations and build rates, please contact your DYNOMAX office.