




|  |                  |                   |
|--|------------------|-------------------|
| <b>Bit Size Range</b>                      | 8-1/2 - 9-7/8 in | 216 - 251 mm      |
| <b>Bit Box Connection</b>                  | 4-1/2 REGULAR    |                   |
| <b>Dynamic Bearing Load On/Off Bottom</b>  | 100357 lbf       | 44600 daN         |
| <b>Static Bearing Load On/Off Bottom</b>   | 355612 lbf       | 158200 daN        |
| <b>Max. Overpull (For Re-run)</b>          | 432800 lbf       | 192500 daN        |
| <b>Absolute Overpull</b>                   | 721400 lbf       | 320900 daN        |
| <b>Adjustable Makeup Torque</b>            | 25000 ft-lbs     | 33900 Nm          |
| <b>Stab/Thread Protector Makeup Torque</b> | 12000 ft-lbs     | 16300 Nm          |
| <b>A = Bit to Stablizer (Centre)</b>       | 21.1 in          | 536 mm            |
| <b>B = Bit to Bend</b>                     | Adjustable       | 66.7 in / 1694 mm |
|  | Fixed            | 54.6 in / 1387 mm |
| <b>C = Overall (With Dump Sub)</b>         | 349.7 in         | 8882 mm           |
| <b>Weight</b>                              | 2457 lbs         | 1114 kg           |

|                                      |                       |            |
|--------------------------------------|-----------------------|------------|
| <b>Lobe Configuration</b>            | 7-8 Lobe 2.9 Stage HR |            |
| <b>Displacement (No Load)</b>        | 0.17 rev/gal          | 0.04 rev/l |
| <b>Max. Differential (Full Load)</b> | 760 psi               | 5240 kPa   |
| <b>Max. Torque</b>                   | 11970 ft-lbs          | 16229 Nm   |
| <b>Max. Power</b>                    | 217 HP                | 161 kW     |

| Flow Rate |      | Speed    |
|-----------|------|----------|
| GPM       | LPM  | RPM      |
| 300       | 1136 | 35 - 49  |
| 475       | 1798 | 65 - 79  |
| 650       | 2461 | 95 - 108 |

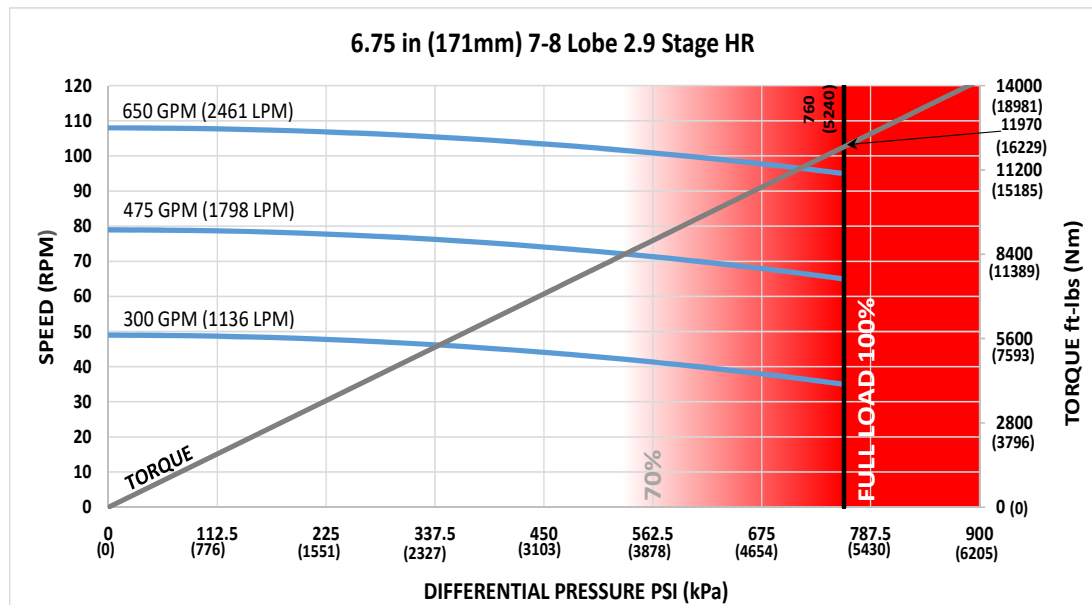

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

**ADJUSTABLE BUILD RATE**

| Hole Size         | SLICK                      |               |               |   | STABILIZED                 |               |               |   |
|-------------------|----------------------------|---------------|---------------|---|----------------------------|---------------|---------------|---|
|                   | 8-1/2 (216mm)              | 8-3/4 (222mm) | 9-7/8 (251mm) | - | 8-1/2 (216mm)              | 8-3/4 (222mm) | 9-7/8 (251mm) | - |
| <b>BEND ANGLE</b> | Degrees per 100 Feet (30m) |               |               |   | Degrees per 100 Feet (30m) |               |               |   |
| 0.39              | 3.6                        | 3.0           | -             | - | 3.6                        | 3.0           | 3.5           | - |
| 0.78              | 6.5                        | 5.8           | 2.8           | - | 6.5                        | 5.8           | 5.9           | - |
| 1.15              | 9.1                        | 8.5           | 5.5           | - | 9.1                        | 8.5           | 8.2           | - |
| 1.50              | 11.7                       | 11.0          | 8.0           | - | 11.7                       | 11.0          | 10.3          | - |
| 1.83              | 14.1                       | 13.4          | 10.4          | - | 14.1                       | 13.4          | 12.3          | - |
| 2.12              | 16.1                       | 15.5          | 12.5          | - | 16.1                       | 15.5          | 14.1          | - |
| 2.38              | 18.0                       | 17.4          | 14.4          | - | 18.0                       | 17.4          | 15.7          | - |
| 2.60              | 19.6                       | 19.0          | 16.0          | - | 19.6                       | 19.0          | 17.0          | - |
| 2.77              | 20.8                       | 20.2          | 17.2          | - | 20.8                       | 20.2          | 18.1          | - |
| 2.90              | 21.8                       | 21.1          | 18.1          | - | 21.8                       | 21.1          | 18.9          | - |
| 2.97              | 22.3                       | 21.6          | 18.6          | - | 22.3                       | 21.6          | 19.3          | - |
| 3.00              | 22.5                       | 21.8          | 18.9          | - | 22.5                       | 21.8          | 19.5          | - |

Note: Stabilizers are 1/8" undergauge

**FBH BUILD RATE**

| Hole Size         | SLICK                      |               |               |   | STABILIZED                 |               |               |   |
|-------------------|----------------------------|---------------|---------------|---|----------------------------|---------------|---------------|---|
|                   | 8-1/2 (216mm)              | 8-3/4 (222mm) | 9-7/8 (251mm) | - | 8-1/2 (216mm)              | 8-3/4 (222mm) | 9-7/8 (251mm) | - |
| <b>BEND ANGLE</b> | Degrees per 100 Feet (30m) |               |               |   | Degrees per 100 Feet (30m) |               |               |   |
| 1.25              | 6.8                        | 6.0           | 2.4           | - | 8.2                        | 8.4           | 9.1           | - |
| 1.50              | 8.6                        | 7.8           | 4.2           | - | 9.8                        | 10.0          | 10.7          | - |
| 1.75              | 10.4                       | 9.6           | 6.0           | - | 11.4                       | 11.6          | 12.3          | - |
| 2.00              | 12.2                       | 11.4          | 7.9           | - | 13.0                       | 13.2          | 14.0          | - |
| 2.25              | 14.0                       | 13.2          | 9.7           | - | 14.6                       | 14.8          | 15.6          | - |
| 2.50              | 15.8                       | 15.0          | 11.5          | - | 16.2                       | 16.4          | 17.2          | - |

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.

For custom motor configurations and build rates, please contact your DYNOMAX office.