




<b>Bit Size Range</b>	8-1/2 - 9-7/8 in	216 - 251 mm
<b>Bit Box Connection</b>	4-1/2 REGULAR	
<b>Dynamic Bearing Load On/Off Bottom</b>	100357 lbf	44600 daN
<b>Static Bearing Load On/Off Bottom</b>	355612 lbf	158200 daN
<b>Max. Overpull (For Re-run)</b>	432800 lbf	192500 daN
<b>Absolute Overpull</b>	721400 lbf	320900 daN
<b>Adjustable Makeup Torque</b>	25000 ft-lbs	33900 Nm
<b>Stab/Thread Protector Makeup Torque</b>	12000 ft-lbs	16300 Nm
<b>A = Bit to Stablizer (Centre)</b>	21.1 in	536 mm
<b>B = Bit to Bend</b>	Adjustable	66.7 in / 1694 mm
	Fixed	54.6 in / 1387 mm
<b>C = Overall (With Dump Sub)</b>	389.7 in	9898 mm
<b>Weight</b>	2827 lbs	1282 kg

<b>Lobe Configuration</b>	7-8 Lobe 5.7 Stage HR	
<b>Displacement (No Load)</b>	0.23 rev/gal	0.06 rev/l
<b>Max. Differential (Full Load)</b>	1340 psi	9239 kPa
<b>Max. Torque</b>	14200 ft-lbs	19253 Nm
<b>Max. Power</b>	319 HP	238 kW

Flow Rate		Speed
GPM	LPM	RPM
300	1136	48 - 70
450	1703	83 - 105
600	2271	118 - 140

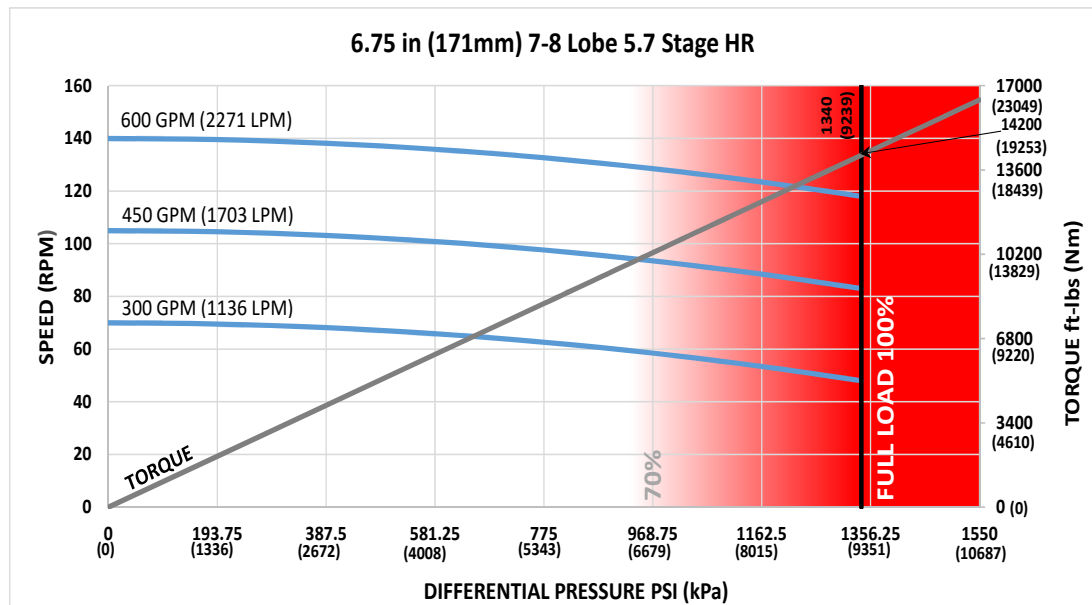

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

**ADJUSTABLE BUILD RATE**

Hole Size	SLICK				STABILIZED			
	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	-	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	-
<b>BEND ANGLE</b>	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
0.39	3.1	2.5	-	-	3.1	2.5	3.0	-
0.78	5.6	5.0	2.4	-	5.6	5.0	5.1	-
1.15	8.0	7.4	4.7	-	8.0	7.4	7.2	-
1.50	10.3	9.7	7.0	-	10.3	9.7	9.2	-
1.83	12.4	11.8	9.1	-	12.4	11.8	11.0	-
2.12	14.3	13.7	11.0	-	14.3	13.7	12.6	-
2.38	16.0	15.4	12.7	-	16.0	15.4	14.1	-
2.60	17.4	16.8	14.1	-	17.4	16.8	15.3	-
2.77	18.5	17.9	15.2	-	18.5	17.9	16.3	-
2.90	19.3	18.7	16.0	-	19.3	18.7	17.0	-
2.97	19.8	19.2	16.5	-	19.8	19.2	17.4	-
3.00	20.0	19.4	16.7	-	20.0	19.4	17.6	-

Note: Stablizers are 1/8" undergauge

**FBH BUILD RATE**

Hole Size	SLICK				STABILIZED			
	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	-	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	-
<b>BEND ANGLE</b>	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
1.25	6.0	5.3	2.1	-	7.3	7.4	8.1	-
1.50	7.6	6.9	3.7	-	8.8	8.9	9.5	-
1.75	9.2	8.5	5.3	-	10.2	10.4	11.0	-
2.00	10.8	10.1	7.0	-	11.7	11.8	12.4	-
2.25	12.4	11.7	8.6	-	13.1	13.3	13.9	-
2.50	14.1	13.4	10.2	-	14.6	14.7	15.3	-

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.

For custom motor configurations and build rates, please contact your DYNOMAX office.