




Bit Size Range	9-7/8 - 12-1/4 in	251 - 311 mm
Bit Box Connection	6-5/8 REGULAR	
Dynamic Bearing Load On/Off Bottom	162510 lbf	72300 daN
Static Bearing Load On/Off Bottom	573485 lbf	255100 daN
Max. Overpull (For Re-run)	554100 lbf	246500 daN
Absolute Overpull	923500 lbf	410800 daN
Adjustable Makeup Torque	40000 ft-lbs	54200 Nm
Stab/Thread Protector Makeup Torque	30000 ft-lbs	40700 Nm
A = Bit to Stabilizer (Centre)	16.87 in	428 mm
B = Bit to Bend	Adjustable	74.7 in / 1897 mm
	Fixed	60.1 in / 1527 mm
C = Overall (With Dump Sub)	343.65 in	8729 mm
Weight	4131 lbs	1874 kg

Lobe Configuration	7-8 Lobe 4 Stage HR	
Displacement (No Load)	0.16 rev/gal	0.04 rev/l
Max. Differential (Full Load)	940 psi	6481 kPa
Max. Torque	14830 ft-lbs	20107 Nm
Max. Power	344 HP	257 kW

Flow Rate		Speed
GPM	LPM	RPM
400	1514	42 - 60
650	2461	82 - 100
900	3407	122 - 140

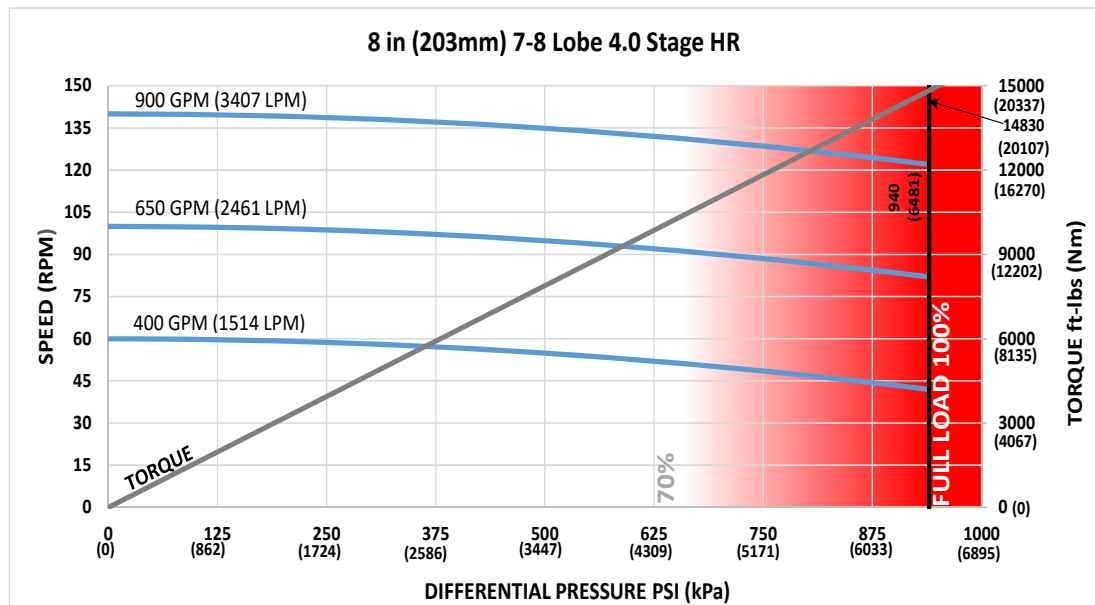

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

ADJUSTABLE BUILD RATE

Hole Size	SLICK				STABILIZED			
	9-7/8 (251mm)	10-5/8 (270mm)	11-1/2 (292mm)	12-1/4 (311mm)	9-7/8 (251mm)	10-5/8 (270mm)	11-1/2 (292mm)	12-1/4 (311mm)
BEND ANGLE	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
0.39	-	-	-	-	2.5	3.1	-	-
0.78	2.3	0.4	-	-	4.8	5.4	6.0	6.6
1.15	5.0	3.2	1.0	-	7.1	7.6	8.2	8.8
1.50	7.6	5.8	3.6	1.8	9.1	9.7	10.3	10.9
1.83	10.1	8.2	6.1	4.2	11.1	11.7	12.3	12.8
2.12	12.2	10.4	8.2	6.4	12.9	13.4	14.0	14.6
2.38	14.2	12.3	10.2	8.3	14.4	15.0	15.6	16.1
2.60	15.8	14.0	11.8	10.0	15.8	16.3	16.9	17.5
2.77	17.1	15.2	13.1	11.2	17.1	17.3	17.9	18.5
2.90	18.0	16.2	14.1	12.2	18.0	18.1	18.7	19.2
2.97	18.6	16.7	14.6	12.7	18.6	18.5	19.1	19.7
3.00	18.8	17.0	14.8	13.0	18.8	18.7	19.3	19.8

Note: Stabilizers are 1/8" undergauge

FBH BUILD RATE

Hole Size	SLICK				STABILIZED			
	9-7/8 (251mm)	10-5/8 (270mm)	11-1/2 (292mm)	12-1/4 (311mm)	9-7/8 (251mm)	10-5/8 (270mm)	11-1/2 (292mm)	12-1/4 (311mm)
BEND ANGLE	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
1.25	5.0	2.8	0.2	-	8.1	8.7	9.3	9.8
1.50	6.9	4.6	2.1	-	9.7	10.2	10.9	11.4
1.75	8.7	6.5	3.9	1.7	11.3	11.8	12.5	13.0
2.00	10.6	8.4	5.8	3.6	12.9	13.4	14.1	14.6
2.25	12.5	10.2	7.6	5.4	14.5	15.0	15.6	16.2
2.50	14.3	12.1	9.5	7.3	16.1	16.6	17.2	17.8

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.

For custom motor configurations and build rates, please contact your DYNOMAX office.