




<b>Bit Size Range</b>	3-7/8 - 4-1/2 in	98 - 114 mm
<b>Bit Box Connection</b>	2-3/8 REGULAR	
<b>Dynamic Bearing Load On/Off Bottom</b>	28230 lbf	12600 daN
<b>Static Bearing Load On/Off Bottom</b>	83280 lbf	37000 daN
<b>Max. Overpull (For Re-run)</b>	78100 lbf	34700 daN
<b>Absolute Overpull</b>	130200 lbf	57900 daN
<b>Adjustable Makeup Torque</b>	2500 ft-lbs	3400 Nm
<b>Stab/Thread Protector Makeup Torque</b>	N/A	N/A
<b>A = Bit to Stabilizer (Centre)</b>	N/A	N/A
<b>B = Bit to Bend</b>	Adjustable Fixed	42.6 in 33.7 in
		1.08 m 0.86 m
<b>C = Overall (With Dump Sub)</b>	164.6 in	4.18 m
<b>Weight</b>	287 lb	130 kg

<b>Lobe Configuration</b>	5-6 Lobe 3.2 Stage PVXT	
<b>Displacement (No Load)</b>	2.241 rev/gal	0.59 rev/l
<b>Max. Differential (Full Load)</b>	1280 psi	8825 kPa
<b>Max. Torque</b>	1190 ft-lbs	1613 Nm
<b>Max. Power</b>	73 HP	55 kW

Flow Rate		Speed
GPM	LPM	RPM
80	303	173 - 200
110	416	248 - 275
140	530	323 - 350

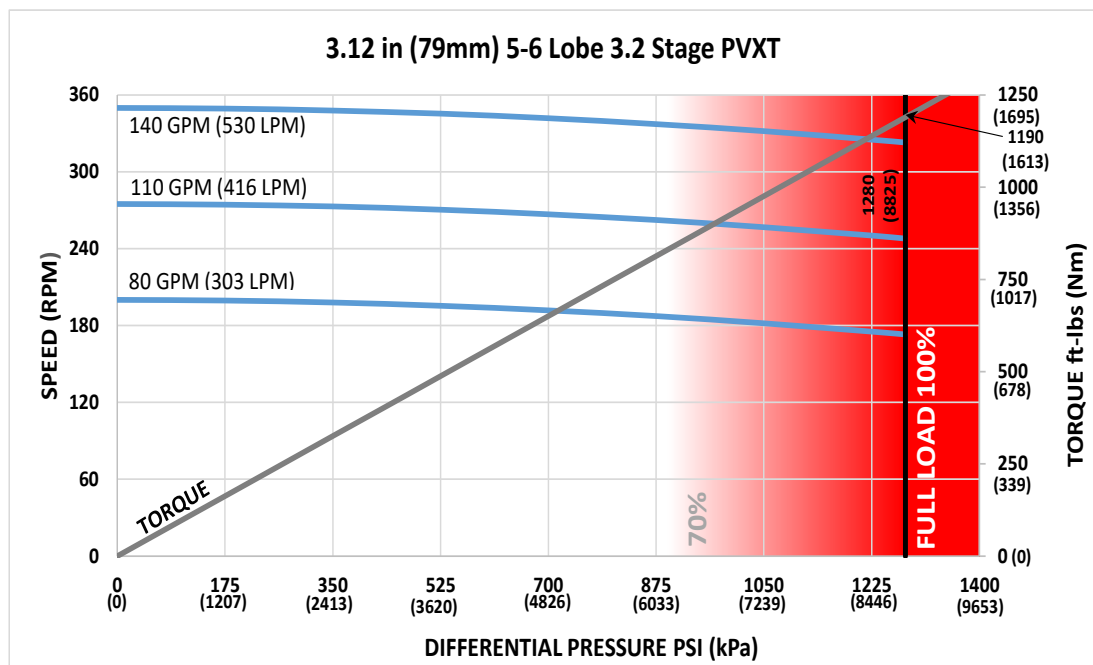

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

**ADJUSTABLE BUILD RATE**

Hole Size	SLICK				STABILIZED			
	3-7/8 (98mm)	4-1/8 (105mm)	4-1/4 (108mm)	4-1/2 (114mm)	3-7/8 (98mm)	4-1/8 (105mm)	4-1/4 (108mm)	4-1/2 (114mm)
<b>BEND ANGLE</b>	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
0.39	2.6	0.2	-	-	N/A	N/A	N/A	N/A
0.78	8.8	6.4	5.2	2.8	N/A	N/A	N/A	N/A
1.15	14.6	12.2	11.0	8.7	N/A	N/A	N/A	N/A
1.50	20.2	17.8	16.6	14.2	N/A	N/A	N/A	N/A
1.83	25.4	23.0	21.9	19.5	N/A	N/A	N/A	N/A
2.12	30.0	27.7	26.5	24.1	N/A	N/A	N/A	N/A
2.38	34.2	31.8	30.6	28.2	N/A	N/A	N/A	N/A
2.60	37.7	35.3	34.1	31.7	N/A	N/A	N/A	N/A
2.77	40.4	38.0	36.8	34.4	N/A	N/A	N/A	N/A
2.90	42.4	40.0	38.9	36.5	N/A	N/A	N/A	N/A
2.97	43.5	41.2	40.0	37.6	N/A	N/A	N/A	N/A
3.00	44.0	41.6	40.4	38.1	N/A	N/A	N/A	N/A

Note: Stabilizers are 1/8" undergauge

**FBH BUILD RATE**


Hole Size	SLICK				STABILIZED			
	3-7/8 (98mm)	4-1/8 (105mm)	4-1/4 (108mm)	4-1/2 (114mm)	3-7/8 (98mm)	4-1/8 (105mm)	4-1/4 (108mm)	4-1/2 (114mm)
<b>BEND ANGLE</b>	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
1.25	19.0	16.1	14.6	11.7	N/A	N/A	N/A	N/A
1.50	23.0	20.1	18.6	15.6	N/A	N/A	N/A	N/A
1.75	27.0	24.0	22.6	19.6	N/A	N/A	N/A	N/A
2.00	42.8	39.9	38.4	35.5	N/A	N/A	N/A	N/A
2.25	50.8	47.8	46.4	43.4	N/A	N/A	N/A	N/A
2.50	58.7	55.8	54.3	51.4	N/A	N/A	N/A	N/A

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.


For custom motor configurations and build rates, please contact your DYNOMAX office.

**FISHING DIMENSIONS**

USC - IMPERIAL (Lengths, Diameters = in)  
SI - METRIC (Lengths = m, Diameters = mm)

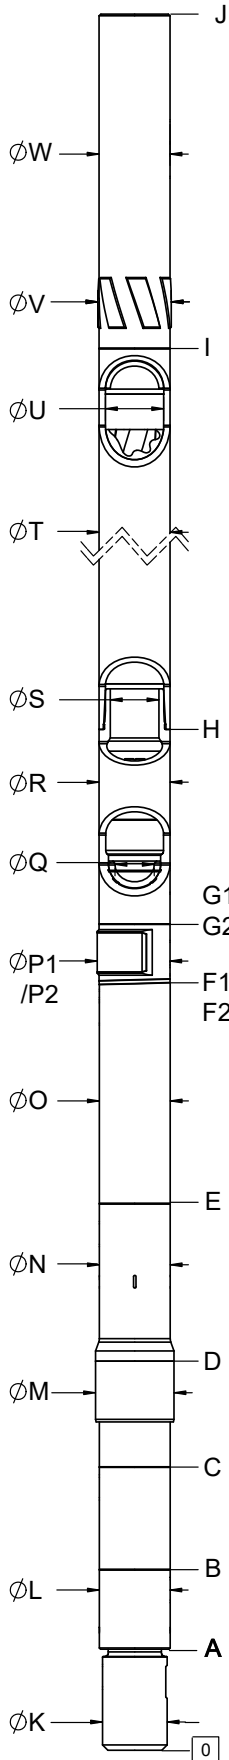

EXTERNALS		USC	SI
END CAP	A	5.0	0.13
BEARING HOUSING	B	8.2	0.21
PISTON HOUSING	C	13.5	0.34
STABILIZER SHOULDER	D	--	--
KICK/FIXED HOUSING	E	28.7	0.73
BIT TO BEND (ADJUSTABLE)	F1	42.6	1.08
ADAPTOR HOUSING (ADJUSTABLE)	G1	47.4	1.20
BIT TO BEND (FIXED)	F2	33.7	0.86
ADAPTOR HOUSING (FIXED)	G2	47.4	1.20
STATOR START	H	59.7	1.52
STATOR END	I	142.1	3.61
OVERALL LENGTH	J	164.6	4.18
BIT BOX Ø	K	3.09	78.5
END CAP/BEARING HOUSING Ø	L	3.12	79.2
THREAD PROTECTOR Ø	M	--	--
PISTON HOUSING Ø	N	3.12	79.2
KICK/FIXED HOUSING Ø	O	3.12	79.2
PAD (ADJUSTABLE) Ø	P1	3.38	85.9
PAD (FIXED) Ø	P2	3.38	85.9
ADJUSTABLE MANDREL PIN Ø	Q	1.82	46.2
ADAPTOR HOUSING Ø	R	3.12	79.2
ADAPTOR PIN Ø	S	2.25	57.2
STATOR TUBE OUTER Ø	T	3.13	79.4
STATOR TUBE INNER Ø	U	2.63	66.8
ROTOR CATCH SUB BLADE Ø	V	3.38	85.9
ROTOR CATCH SUB Ø	W	3.13	79.5

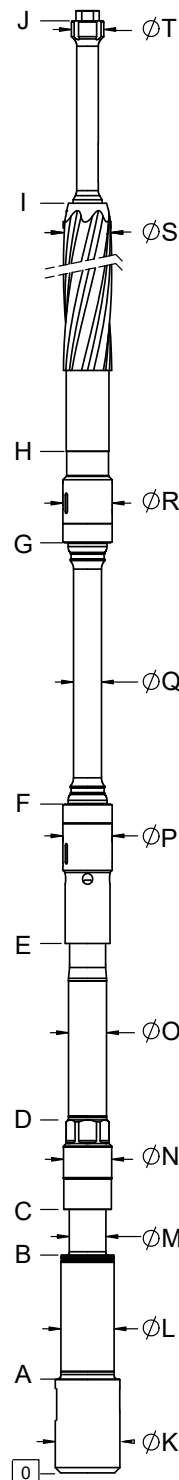

INTERNALS		USC	SI
BIT BOX	A	4.5	0.11
THRUST SHOULDER	B	9.9	0.25
WASHPIPE START	C	12.1	0.31
HEX END	D	17.1	0.43
BEARING ASSEMBLY ADAPTOR	E	28.1	0.71
BAA CAP	F	35.6	0.90
ROTOR ADAPTOR CAP	G	54.0	1.37
ROTOR START	H	59.6	1.51
ROTOR END	I	59.6	1.51
CATCH STEM	J	69.1	1.76
BIT BOX Ø	K	3.09	78.5
MANDREL Ø	L	2.25	57.2
THRUST Ø	M	1.63	41.4
WASHPIPE LARGE Ø	N	2.13	54.1
WASHPIPE SMALL Ø	O	1.75	44.5
BEARING ASSEMBLY ADAPTOR Ø	P	2.35	59.7
DRIVESHAFT Ø	Q	1.06	26.9
ROTOR ADAPTOR Ø	R	2.35	59.7
ROTOR MAJOR DIA. Ø	S	2.10	53.3
ROTOR CATCH STEM Ø	T	1.70	43.2

This information is for reference only. Assemblies are displayed in an "Adjustable Configuration"

Rotor Catch and Rotor Catch Float Sub Lengths may vary based on configuration, and use of Dump Subs or combination Rotor Catch and Float Housings.

If any additional information is required, please contact your local DYNOMAX office.