



9.62 in (244mm) 7-8 Lobe 5.7 Stage HR RS FLEXSHAFT - MUD LUBE

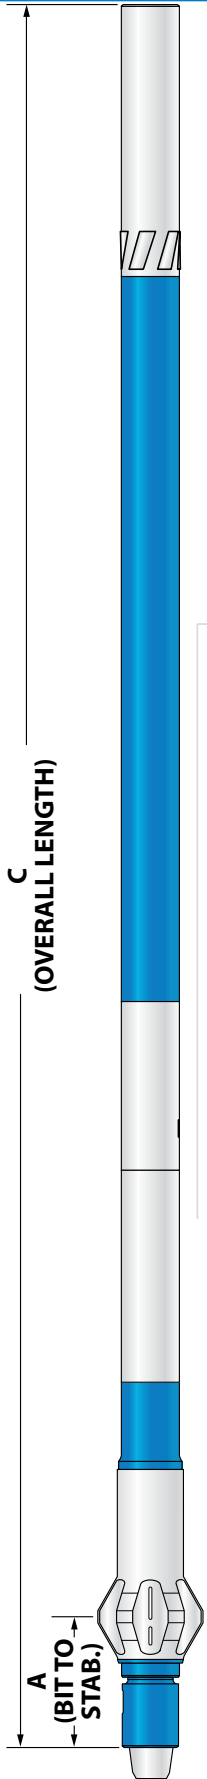

Bit Size Range	12-1/4 - 17-1/2 in	311 - 445 mm
Downhole Connection	6-5/8 or 7-5/8 REGULAR	
Dynamic Bearing Load On/Off Bottom	188513 lbf	83900 daN
Static Bearing Load On/Off Bottom	1092750 lbf	486100 daN
Max. Overpull (For Re-run)	721400 lbf	320900 daN
Absolute Overpull	1202300 lbf	534800 daN
Stab/Thread Protector Makeup Torque	38000 ft-lbs	51500 Nm
A = Bit to Stabilizer (Centre)	24.6 in	0.62 m
C = Overall (With Rotor Catch Float Sub)	444.5 in	11.29 m
Weight	6618 lb	3002 kg

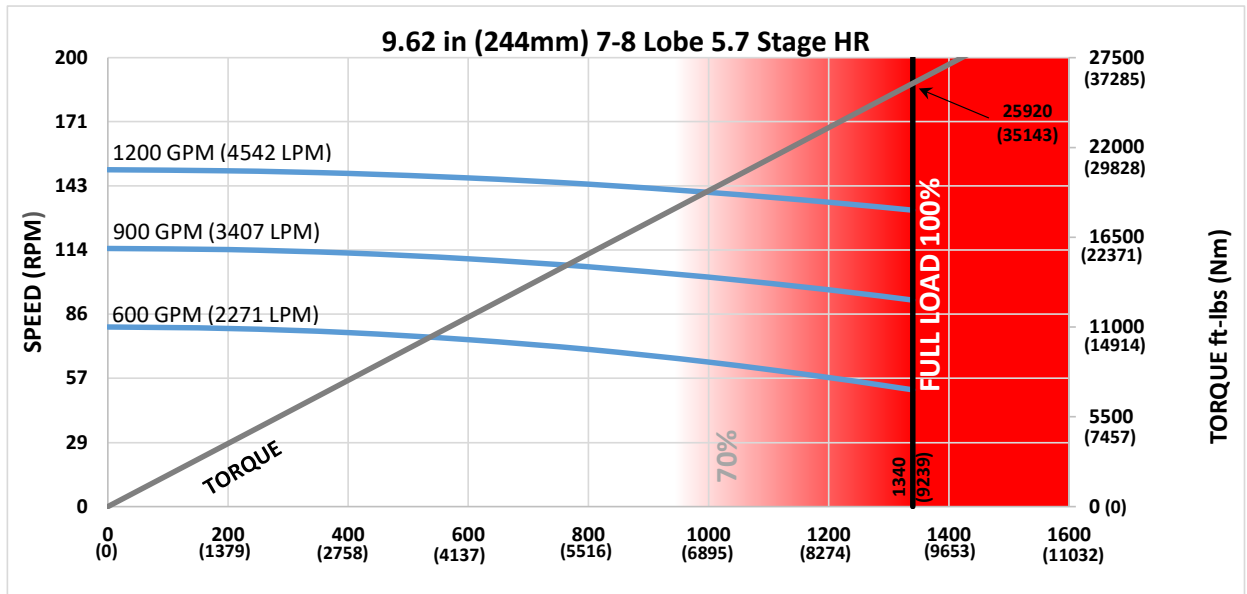

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

Lobe Configuration	7-8 Lobe 5.7 Stage HR	
Displacement (No Load)	0.13 rev/gal	0.03 rev/l
Max. Differential (Full Load)	1340 psi	9239 kPa
Max. Torque	25920 ft-lbs	35143 Nm
Max. Power	651 HP	486 kW

Flow Rate		Speed
GPM	LPM	RPM
600	2271	52 - 80
900	3407	92 - 115
1200	4542	132 - 150


This information is for reference only.

RS FLEXSHAFT Motors are available with Integral Blade Bearing Housings or Screw-On Style Stabilizers.


Contact your local DYNOMAX office for Stabilizer Sizes and Availability.

FISHING DIMENSIONS

USC - IMPERIAL (Lengths, Diameters = in)
SI - METRIC (Lengths = m, Diameters = mm)

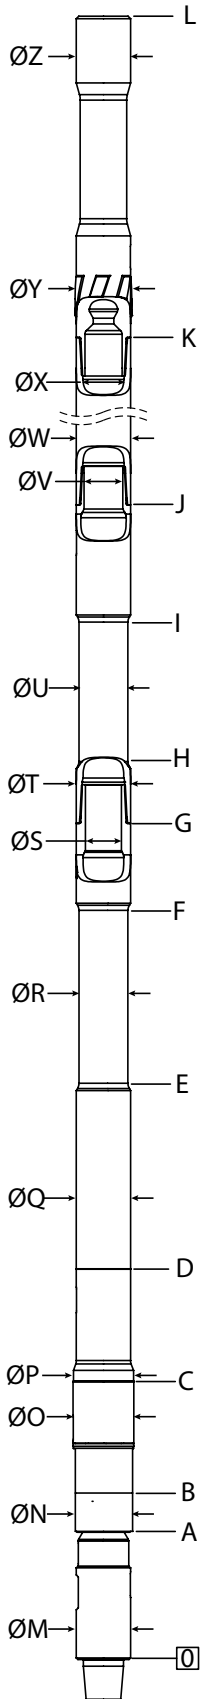

EXTERNALS		USC	SI
LOWER HSG. FLOW REST.	A	16.0	0.41
BEARING HSG. START	B	23.1	0.59
STABILIZER SHOULDER	C	49.1	1.25
STRAIGHT HOUSING	D	59.5	1.51
STRAIGHT HOUSING FLEX START	E	88.9	2.26
STRAIGHT HOUSING FLEX END	F	122.9	3.12
ADAPTOR HOUSING	G	130.9	3.32
ADAPTOR HOUSING FLEX START	H	137.4	3.49
ADAPTOR HOUSING FLEX END	I	148.9	3.78
STATOR START	J	165.5	4.20
STATOR END	K	405.5	10.30
OVERALL LENGTH	L	444.5	11.29
BIT BOX Ø	M	9.00	228.6
LOWER HSG. FLOW REST. Ø	N	8.80	223.5
THREAD PROTECTOR Ø	O	10.75	273.1
BEARING HOUSING SHOULDER Ø	P	10.75	273.1
STRAIGHT HOUSING Ø	Q	9.62	244.3
STRAIGHT HOUSING FLEX Ø	R	9.00	228.6
STRAIGHT HOUSING PIN Ø	S	7.00	177.8
ADAPTOR HOUSING Ø	T	9.62	244.3
ADAPTOR HOUSING FLEX Ø	U	9.21	233.9
ADAPTOR HOUSING PIN Ø	V	7.00	177.8
STATOR Ø	W	9.62	244.3
STATOR ID Ø	X	7.88	200.2
HARDFACING Ø	Y	9.87	250.7
ROTOR CATCH FLOAT SUB Ø	Z	9.63	244.6

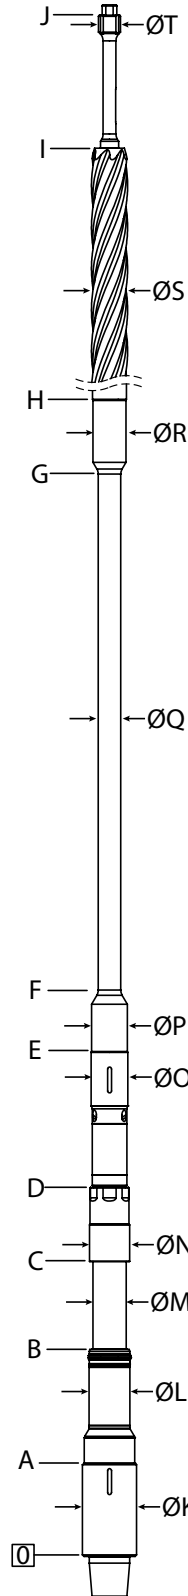

INTERNALS		USC	SI
BIT BOX	A	11.0	0.28
LOWER SHAFT FLOW REST.	B	29.1	0.74
COMPRESSION NUT.	C	45.1	1.15
BEARING ASSEMBLY ADAPTOR	D	53.7	1.36
DRIVESHAFT START	E	74.8	1.90
DRIVESHAFT FLEX START	F	80.9	2.05
DRIVESHAFT FLEX END	G	154.9	3.93
ROTOR START	H	165.5	4.20
ROTOR END	I	396.4	10.07
ROTOR CATCH END	J	412.4	10.47
BIT BOX Ø	K	9.00	228.6
FLOW RESTRICTOR Ø	L	7.06	179.3
MANDREL Ø	M	5.71	145.0
COMPRESSION NUT Ø	N	6.79	172.5
BEARING ASSEMBLY ADAPTOR Ø	O	7.10	180.3
DRIVESHAFT LOWER HEAD Ø	P	6.00	152.4
DRIVESHAFT FLEX Ø	Q	4.00	101.6
DRIVESHAFT UPPER HEAD Ø	R	5.50	139.7
ROTOR Ø	S	6.43	163.3
ROTOR CATCH STEM Ø	T	4.38	111.3

This information is for reference only.

Rotor Catch and Rotor Catch Float Sub Lengths may vary based on configuration, and use of Dump Subs or combination Rotor Catch and Float Housings.

If any additional information is required, please contact your local DYNOMAX office.